


VF Series Triple Mesh Dust Filter – Type VH-08

Typical Attenuation

<u>Frequency</u>	<u>Field</u>	<u>Attenuation</u>
10KHz	H	42 dB
100KHz	H	53 dB
1MHz	H	61 dB
1MHz	E	92 dB
10MHz	E	81 dB
100MHz	E	60 dB
1GHz	E	52 dB
10GHz	E	43 dB

Performance figures based on a 250 mm x 250 mm test piece

The VH-08 dust filter assemblies are constructed from three layers of corrugated aluminium mesh held in a 'C' section aluminium extruded frame. Please see standard profiles available in our catalogue. For protection of the mesh an expanded aluminium kick plate is fitted within the frame. It is recommended that these units are used in conjunction with fan assisted forced air ventilation.

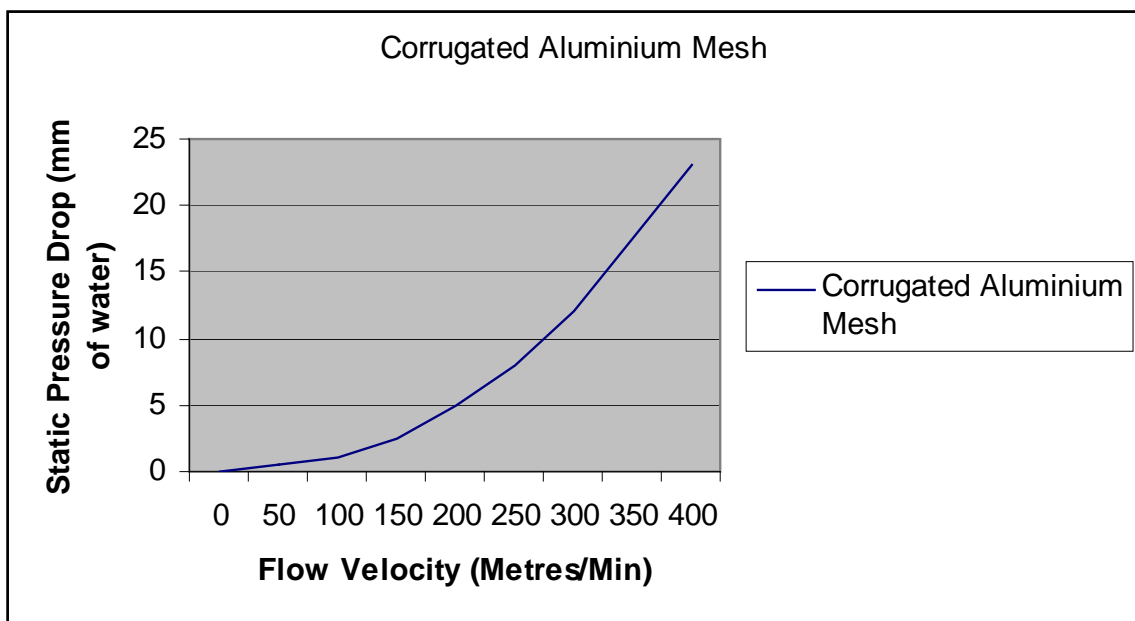

PPT011207



P & P Technology Ltd
 1 Finch Drive, Springwood
 Braintree, Essex, CM7 2SF, UK
 Tel: +44 (0) 1376 550525 Fax: +44 (0) 01376 552389
 Email: info@p-p-t.co.uk Web: www.p-p-t.co.uk

